



FINAL INSPECTION REPORT 1x3 Wavelength Combiner / Splitter (WDM)

Item #: RYB54HF
SN: A000581


Center Wavelength
Blue Port: 488 nm
Yellow Port: 588 nm
Red Port: 640 nm
Maximum Optical Power ^a
With Connectors or Bare Fiber: 50 mW
Spliced: 100 mW
Fiber Type: Nufern 460-HP

Test Data at Center Wavelength ^b			
Port Jacket Color	Blue	Yellow	Red
Wavelength	488 nm	588 nm	640 nm
Transmission ^c	92.04%	93.97%	95.28%
Insertion Loss ^d	0.36 dB	0.27 dB	0.21 dB
Isolation ^e	White Port	N/A	26.2 dB
	Red Port	24.9 dB	N/A
	Blue Port	25.2 dB	N/A

Test Data over Bandwidth ^b			
Bandwidth	483-493 nm	583-593 nm	635-645 nm
Transmission ^c	84.7%	88.7%	90.6%
Insertion Loss ^d	0.72 dB	0.52 dB	0.43 dB
Isolation ^e	White Port	N/A	18.59 dB
	Red Port	18.65 dB	N/A
	Blue Port	15.68 dB	16.05 dB

- a. Specifies the maximum power allowed through the component. Performance and reliability under high power conditions must be determined within the user's setup.
- b. All values are measured at room temperature without connectors.
- c. Calculated from measured insertion loss data below.
- d. Insertion loss is the ratio of the input power to the output power for each port of the wavelength combiner / splitter (WDM).
- e. Isolation represents the minimum crosstalk between ports.

Verified by: _____

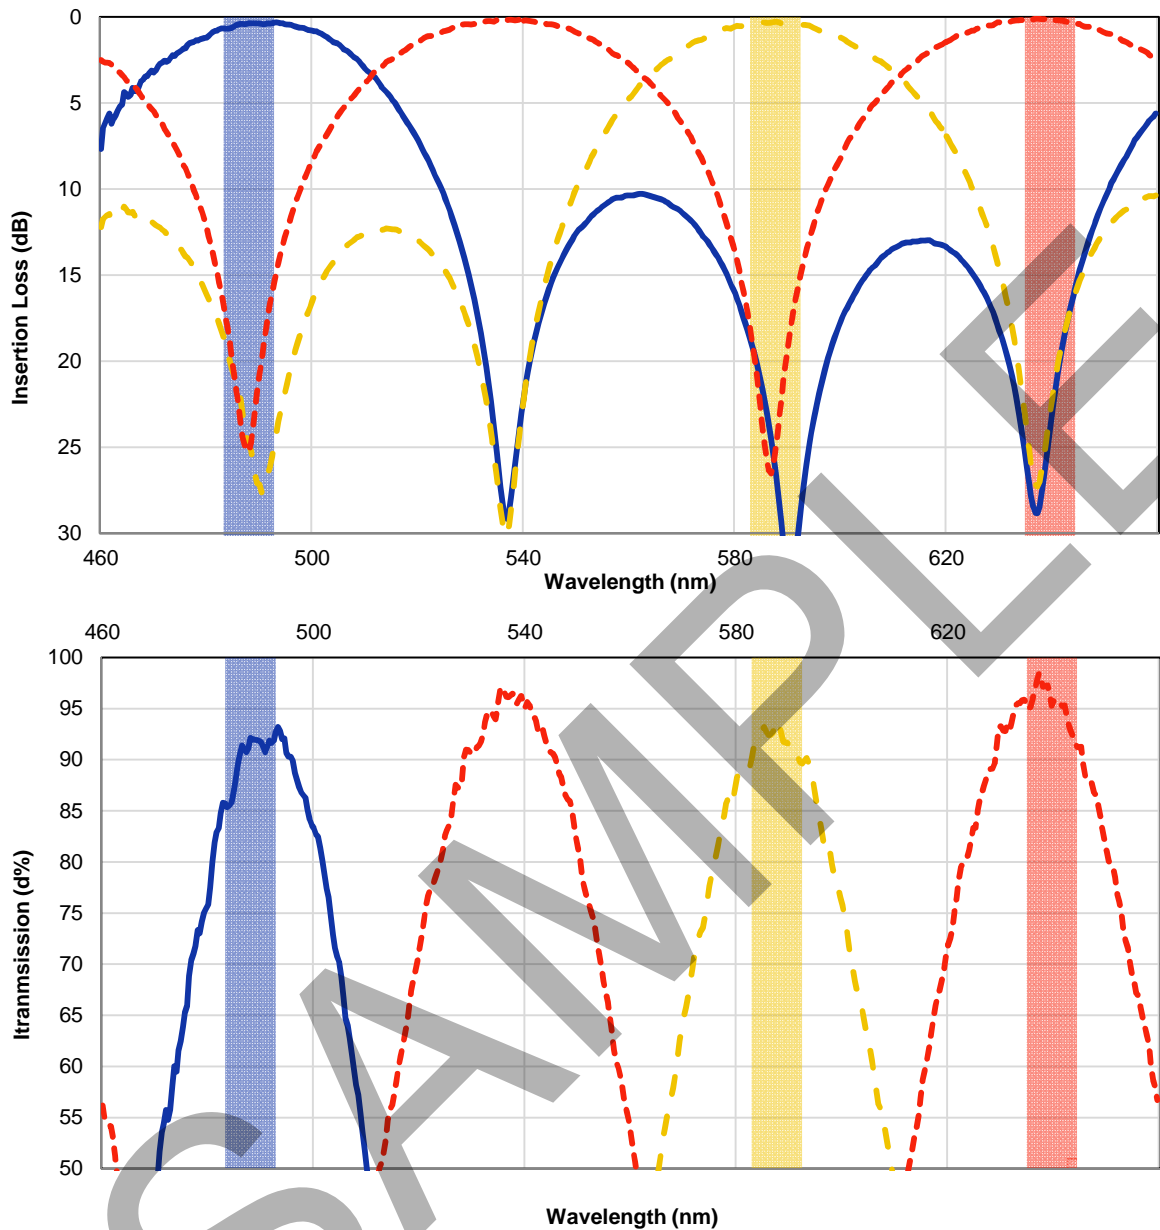

This wavelength combiner / splitter (WDM) operation is only guaranteed over the specified bandwidth as defined by the colored regions above. Thorlabs displays a wider wavelength range to provide insight into how this particular device would perform if used outside its guaranteed operating range. The out-of-band performance can vary from device to device.